

# Runtime Monitoring of Real-time Safety Requirements in Smart Cities

Meiyi Ma<sup>\*</sup>, Ezio Bartocci<sup>†</sup>, Lu Feng<sup>\*</sup>, and John Stankovic<sup>\*</sup>

<sup>\*</sup>Department of Computer Science, University of Virginia, Charlottesville, VA, USA

<sup>†</sup>Faculty of Informatics, TU Wien, Austria

Email: {<sup>\*</sup>meiyi, <sup>\*</sup>lu.feng, <sup>\*</sup>stankovic}@virginia.edu, <sup>†</sup>ezio.bartocci@tuwien.ac.at

**Abstract**—There is an increasing need for the runtime monitoring of real-time safety and performance requirements in smart cities. In this paper, we present SaSTL—a novel Spatial Aggregation Signal Temporal Logic—to specify and monitor real-time requirements in smart cities. We also develop an efficient runtime monitoring algorithm that can check in parallel a SaSTL requirement over multiple data streams generated from thousands of sensors that are typically spatially distributed over a smart city. We evaluate the real-time SaSTL monitor by applying it to two city application scenarios with large-scale real sensing data (e.g., up to 10,000 sensors in one requirement). The results show that SaSTL monitoring can help improve the city’s performance in simulated experiments (e.g., 21.1% on the environment and 16.6% on public safety) with a significant reduction of computation time compared with previous approaches (e.g., from 2 hours to 30 minutes on average when monitoring 80 requirements).

**Index Terms**—Runtime Monitoring, Real-time Safety Requirement, Spatial-Aggregation Signal Temporal Logic, Efficient Monitoring, Smart Cities

## I. INTRODUCTION

Smart cities are emerging around the world as cities deploy various sensors and Internet of Things (IoT) platforms to enhance the efficiency and performance [1]. Meanwhile, there is an increasing need for the runtime monitoring of safety requirements in smart cities, due to the potential conflicts among numerous smart services independently developed and deployed by various stakeholders [2], [3].

In this paper, we first report our findings from studying over 400 requirements extracted from various standards, regulations, rules and laws of 7 smart cities around the world. One of our key observations is that most smart city requirements have real-time constraints such as deadlines (e.g., within one minute) and time intervals (e.g., 4-7 PM). In addition, these requirements are often concerned with real-valued time series data (e.g., air quality, noise level) across a large scale of spatial range (e.g., data measured from hundreds of sensors distributed within a city).

Next, we formalize these requirements using a novel *Spatial Aggregation Signal Temporal Logic* (SaSTL) and present efficient algorithms for the runtime monitoring of such requirement specifications. Signal Temporal Logic (STL) is a formal specification language used to express temporal properties over real-valued trajectories with dense-time intervals, commonly used to describe behaviors of cyber-physical systems [4]. Ma et al. [5] used STL to specify and monitor smart city

requirements. However, there are several limitations in the prior work of using STL-based monitoring for smart cities. The expressiveness of STL is limited for specifying smart city requirements concerning spatial relations and aggregations. For example, STL cannot specify the following city requirement: “the average noise level within 1 km of all elementary schools should always be less than 50 dB”. Furthermore, STL-based monitoring would become very time-consuming for checking requirements over multiple sensors distributed in a set of locations, and not feasible to yield results at runtime for real-time city operations. The challenge escalates when many requirements have to be monitored simultaneously in a real city.

We address these limitations by presenting the new SaSTL specification language for smart cities, which extends time-based STL to the spatial domain with a *spatial aggregation* operator and a *spatial counting* operator. SaSTL can be used to specify Point of Interests (PoIs), the physical distance, spatial relations of the PoIs and sensors, aggregation of signals over locations, degree/percentage of satisfaction and the temporal elements in a very flexible spatial-temporal scale. We can even use a single SaSTL formula to concisely specify requirements over hundreds of sensors across the smart city, which would not be possible using STL.

We also present monitoring algorithms for SaSTL, and develop two methods to speed up the monitoring performance. One is to prioritize the monitoring based on cost functions assigned to nodes of the syntax tree resulting from parsing a SaSTL formula. The other method is to parallel the monitoring of spatial operators among multiple locations and/or sensors. We show that both methods improve the time complexity of SaSTL monitoring algorithms.

Finally, we evaluate our SaSTL monitoring approach by applying it to two city application scenarios with large-scale real sensing data (e.g., up to 10000 sensors in one requirement): (i) runtime conflict detection and resolution among smart services in simulated New York city, and (ii) runtime monitoring of real city data collected from the Chicago’s Array of Things project [6]. We envision that SaSTL monitoring results can bring benefits to various stakeholders in smart cities, from informing city managers to make better decisions, to helping citizens to plan everyday activities.

**Contributions.** The main contributions of this paper include:

- A study of over 400 real smart city requirements.

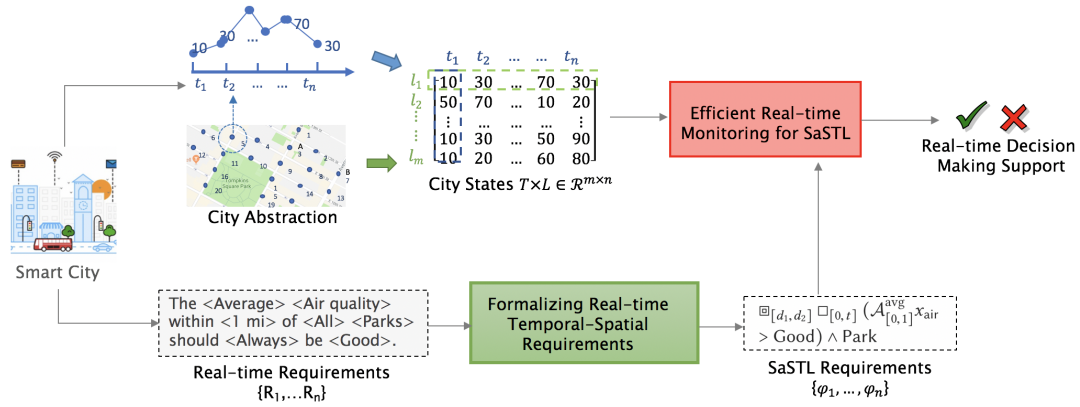


Figure 1: A framework for runtime monitoring of real-time city requirements

- A new SaSTL specification language for formalizing smart city requirements.
- Efficient runtime monitoring algorithms for SaSTL that can check real-time and spatial requirements.
- Experimental evaluation of SaSTL monitoring on two large-scale smart city application scenarios.

## II. APPROACH OVERVIEW

Figure 1 shows an overview of our runtime monitoring framework for smart cities. We envision that such a framework would operate in a smart city’s central control center (e.g., IBM’s Rio de Janeiro Operations Center [7] and Cisco’s Smart+Connected Operations Center [8]) where sensor data about city states across various locations are available in real time. The framework would monitor city states and check them against a set of smart city requirements at the runtime. The monitoring results would be presented to city managers to support decision making. The framework makes abstractions of city states in the following way. For each entity (e.g. CO emission in the city), the data stream over temporal and spatial domains can be viewed as a 2-dimensional  $T \times L \in \mathbb{R}^{m \times n}$  matrix, as illustrated in Figure 1. Each row is a time-series data ( $n$  samples within the time interval  $T$ ) at one location and each column is a set of data streams from all locations ( $m$  locations within the spatial range  $L$ ) at one time. Meanwhile, the framework formalize a set of real-time smart city requirements (e.g., “the average air quality within 1 mi of all parks should always be good”) to some machine checkable SaSTL formulas. We will describe more details about each building block of the framework in the following sections.

## III. REAL-TIME REQUIREMENT

To better understand real city requirements, we conduct a requirements study. We collect a set of city requirements (e.g., standards, regulations, rules and laws) across different application domains, including energy, environment, transportation, emergency, and public safety from seven large cities (New York City, San Francisco, Chicago, Washington D.C., Aarhus, Hong Kong and Beijing). We extract 200 qualitatively-defined and 200 quantitatively-defined requirements from them, evenly

distributed across the five application domains. Some examples of these city requirements are highlighted in Table I.

By studying these 400 real city requirements, we make the following important observations, thus identifying key required features to have in a specification language and its associated use in a real-time monitor.

First, the city requirements are highly real-time driven. Most of the requirements include a variety of real-time constraints, e.g. a deadline, a dynamic deadline, fixed time periods, or time intervals. Some examples from Table I,

- Deadlines: “a week” (11th row)
- Dynamic deadlines: “one minute” and “10 consecutive seconds” (1st and 2nd rows)
- Time intervals: “between the hours of 4 to 7 P.M.” (6th row)
- Time periods: “weekdays” (3rd row) and “DAY, NIGHT” (7th row)

To enhance safety and performance, cities tend to detect and take actions to resolve requirement violations, or even predict potential violations and take precautions to prevent such violations in real time, which requires that the violations should be detected before a certain deadline.

Second, the requirements specify a very large spatial scale. Different from the requirements of many other cyber physical systems, requirements from smart cities are highly spatial-specific and usually involve a very large number of spatial ranges and a large number of locations/sensors. For example, the first requirement in Table I specifies a vehicle idling time “adjacent to any school, pre-K to 12th grade in the City of New York”. There are about 2000 pre-K to 12th schools, even counting 20 street segments nearby each school, there will be 40,000 data streams to be monitored continuously.

Third, the syntax of city requirements from different domains is composed of six key elements, i.e. temporal, spatial, aggregation, entity, comparison, and condition. The semantics of the requirements are less domain specific. These elements and patterns are equally important in all five application domains, which indicates that the templates to specify requirements are more reasonable to be categorized by the semantics, instead of by the application domain.

Table I: Examples of city requirements from different domains (The key elements of a requirement are highlighted as, **temporal**, **spatial**, **aggregation**, **entity**, **condition**, **comparison**.)

| Domain         | Example                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Transportation | Limits vehicle idling to one minute adjacent to any school, pre-K to 12th grade, public or private, in the City of New York [9].                                                                                                                                                                                                                                                                                                                                          |
|                | The engine, power and exhaust mechanism of each motor vehicle shall be equipped, adjusted and operated to prevent the escape of a trail of visible fumes or smoke for more than ten (10) consecutive seconds.                                                                                                                                                                                                                                                             |
|                | Prohibit sight-seeing buses from using all bus lanes between the hours of 7:00 a.m. and 10:00 a.m. on weekdays [10].                                                                                                                                                                                                                                                                                                                                                      |
| Energy         | Operate the system to maintain zone temperatures down to 55°F (13°C) or up to 85°F (29°C) [11].                                                                                                                                                                                                                                                                                                                                                                           |
|                | The total leakage shall be less than or equal to 4 cubic feet per minute (113.3 L/min) per 100 square feet of conditioned floor area [12].                                                                                                                                                                                                                                                                                                                                |
| Environment    | It shall be unlawful for any person, between the hours of 8:00 p.m. of any day and 7:00 a.m. of the following day to erect, construct, demolish, excavate for, alter or repair any building or structure if the noise level created thereby is in excess of the ambient noise level by 5 dB at the nearest property plane, unless a special permit therefor has been applied for and granted by the Director of Public Works or the Director of Building Inspection [13]. |
|                | LA Sec 111.03 minimum ambient noise level table: ZONE M2 and M3 – DAY : 65 dB(A) NIGHT : 65 dB(A).                                                                                                                                                                                                                                                                                                                                                                        |
|                | The total amount of HCHO emission should be less than 0.1mg per m <sup>3</sup> within an hour, and the total amount of PM10 emission should be less than 0.15 mg per m <sup>3</sup> within 24 hours [14].                                                                                                                                                                                                                                                                 |
| Emergency      | NYC Authorized emergency vehicles may disregard 4 primary rules regarding traffic [15].                                                                                                                                                                                                                                                                                                                                                                                   |
|                | At least one ambulance should be equipped per 30,000 population (counted by area) to obtain the shortest emergency radius and the fastest response time [16].                                                                                                                                                                                                                                                                                                             |
| Public Safety  | Security staff shall visit at least once per week in public schools [17].                                                                                                                                                                                                                                                                                                                                                                                                 |

**Temporal:** It specifies the temporal range of a requirement. Usually, it is a deadline like “within one minute”, or time interval like “between the hours of 7:00 a.m. and 10 a.m.”, “after 9:00 p.m.” or “weekdays”. In some requirements, it is not explicitly specified, but implicitly indicates a time period.

**Spatial:** It specifies the spatial range of a requirement. Similar to the temporal, it is specified with a distance range or entire areas in default. Another common form is specified using the Points of Interest (PoIs), such as “park”, etc.

**Aggregation:** In many cases, instead of checking the data from one location directly, requirements tend to be specified on the aggregated data over an area or time, such as, “the total amount”, “average...per 100 square feet”, per day, etc.

**Entity:** An entity requirement specifies the variable of interest, such as, “noise level”, “energy consumption”, etc.

**Comparison:** Comparison requirements usually specify the threshold of the variable, e.g., “up to 85°F”. In other cases, it also defines true or false, e.g., “the street is blocked”.

**Condition:** In a broad definition, conditions specify the condition or special cases of the requirement, such as, “if/unless”, “until”, and “except”.

Fourth, many requirements are written in a very ambiguous way. The description is at high-level and often imprecise. For example, in DC Air Pollutants [18], it says that “*An emission into the atmosphere of odorous or other air pollutants from any source in any quantity and of any characteristic, and duration which is, or is likely to be injurious to the public health or welfare, or which interferes with the reasonable enjoyment of life and property is prohibited*”. It basically states an environmental requirement regarding air pollution. However, there is no quantitative definition of the emission that “*is likely to be injurious to the public health or welfare, or which interferes with the reasonable enjoyment of life and property*”.

Even two human beings could make different decisions for the same situation based on this requirement; the monitor cannot specify or monitor a requirement like this. On the other hand, this problem indicates the important demand for a tool to help specify city requirements formally.

To help and inspire users to specify requirements precisely without knowledge of SaSTL formulas, we define a series of templates using structured language learning from the existing city requirements. For example, a template is written as, “The <aggregation operator> <entity> within <d> km of <spatial operator> <PoIs> should <temporal operator> be <compare> <parameter> within the next <t> hours (from <m>th hour to <n>th hour)”. Using this template, a city administrator can easily specify an environmental requirement (and encourage quantitative details) as “The <average> <air quality> within <1> mile of all <parks> should <always> be <above> <good> in the <next 3 hours>.”

#### IV. FORMALIZING REAL-TIME TEMPORAL-SPATIAL REQUIREMENTS

We formalize smart city real-time spatial requirements by creating a novel city-based *Spatial Aggregation Signal Temporal Logic* (SaSTL), which extends STL [19].

In Section III, we identified six key elements for specifying a requirement, which includes not only temporal, but also spatial, aggregation, conditions and comparisons. Despite some existing spatial extensions of STL (we refer to Section VII for a more detailed discussion on the related work), such as SSTL [20] and STREL [21], which can express requirements such as, “there should be no traffic congestion on all the roads”, we realized that they are not expressive enough to specify requirement like “there should be no traffic congestion on all the roads on average”, or “on 90% of the roads”, which

are types of requirements that are more practical and needed in a smart city.

Therefore, SaSTL extends STL with two spatial operators: a *spatial aggregation* operator and a *neighborhood counting* operator. Spatial aggregation enables combining (according to a chosen operation) measurements of the same type (e.g., environmental temperature), but taken from different locations. The use of this operator can be suitable in requirements where it is necessary to evaluate the average, best or worst value of a signal measurement in an area close to the desired location. The neighborhood counting operator allows measuring the number of neighbors of a location that satisfy a certain requirement. In this section, we formally define the syntax, and semantics.

#### A. SaSTL Syntax

We define a *spatial-temporal signal* as  $\omega : \mathbb{T} \times L \rightarrow D$ , where  $\mathbb{T} = \mathbb{R}_{\geq 0}$  represents continuous time,  $L$  is the set of locations, and  $D \subseteq (\mathbb{R} \cup \mathbb{B} \cup \{\perp\})^n$  is the domain of evaluation. We denote by  $\pi_v(\omega)$  the projection of  $\omega$  on its component variable  $v \in X \cup P$ , where  $X$  and  $P$  are finite sets of real and propositional variables that can also be null (i.e.,  $v = \perp$ ).

A *weighted undirected graph* is a tuple  $G = (L, E, \eta)$  where  $L$  is a finite non-empty set of nodes representing locations,  $E \subseteq L \times L$  is the set of edges connecting nodes, and  $\eta : E \rightarrow \mathbb{R}_{\geq 0}$  is a cost function over edges. We define the *weighted distance* between two locations  $l, l' \in L$  as

$$d(l, l') := \min \left\{ \sum_{e \in \sigma} \eta(e) \mid \sigma \text{ is a path between } l \text{ and } l' \right\}.$$

We denote by  $L_{[d_1, d_2]}^l := \{l' \in L \mid 0 \leq d_1 \leq d(l, l') \leq d_2\}$  the set of locations at a distance between  $d_1$  and  $d_2$  from  $l$ . We denote the set of non-null values for signal variable  $x$  at time point  $t$  over locations in  $L_{[d_1, d_2]}^l$  by

$$\alpha_{[d_1, d_2]}^x(\omega, t, l) := \{\pi_x(\omega)[t, l'] \mid l' \in L_{[d_1, d_2]}^l \text{ and } \pi_x(\omega)[t, l'] \neq \perp\}.$$

We define a set of operations  $\text{op}(\alpha_{[d_1, d_2]}^x(\omega, t, l))$  for  $\text{op} \in \{\max, \min, \text{sum}, \text{avg}\}$  that computes the maximum, minimum, summation and average of values in the set  $\alpha_{[d_1, d_2]}^x(\omega, t, l)$ , respectively. Note that  $\text{op}(\alpha_{[d_1, d_2]}^x(\omega, t, l))$  is only well-defined when  $\alpha_{[d_1, d_2]}^x(\omega, t, l) \neq \emptyset$ .

The syntax of SaSTL is given by

$$\varphi := p \mid x \sim c \mid \neg \varphi \mid \varphi_1 \wedge \varphi_2 \mid \varphi_1 \mathcal{U}_I \varphi_2 \mid \mathcal{A}_{[d_1, d_2]}^{\text{op}} x \sim c \mid \mathcal{C}_{[d_1, d_2]}^{\text{op}} \varphi \sim c$$

where  $p \in P$ ,  $x \in X$ ,  $\sim \in \{<, \leq\}$ ,  $c \in \mathbb{Q}$  is a constant,  $I \subseteq \mathbb{R}_{>0}$  is a real positive dense time interval,  $\mathcal{U}_I$  and  $\mathcal{S}_I$  are the *bounded until* and *past* temporal operators from STL. The *always* (denoted  $\square$ ) and *eventually* (denoted  $\diamond$ ) temporal operators can be derived the same way as in STL, where  $\diamond \varphi \equiv \text{true } \mathcal{U}_I \varphi$ , and  $\square \varphi \equiv \neg \diamond \neg \varphi$ .

We define a set of new spatial *aggregation* operators  $\mathcal{A}_{[d_1, d_2]}^{\text{op}} x \sim c$  for  $\text{op} \in \{\max, \min, \text{sum}, \text{avg}\}$  that evaluate the aggregated product of traces  $\text{op}(\alpha_{[d_1, d_2]}^x(\omega, t, l))$  over a set of locations, where  $[d_1, d_2]$  is a spatial interval with  $d_1 < d_2$  and  $d_i \in \mathbb{R}$ .

We also define a set of new spatial *counting* operators  $\mathcal{C}_{[d_1, d_2]}^{\text{op}} \varphi \sim c$  for  $\text{op} \in \{\max, \min, \text{sum}, \text{avg}\}$  that counts the satisfaction of traces over a set of locations. More precisely, we define  $\mathcal{C}_{[d_1, d_2]}^{\text{op}} \varphi = \text{op}(\{(\omega, t, l') \models \varphi \mid l' \in L_{[d_1, d_2]}^l\})$ .

From the new *counting* operators we defined, we also derive *everywhere* operator as  $\boxplus_{[d_1, d_2]} \varphi \equiv \mathcal{C}_{[d_1, d_2]}^{\text{sum}} \varphi \sim N$  where  $N$  is the number of nodes over the locations  $L_{[d_1, d_2]}^l$ , and *somewhere* operator  $\boxtimes_{[d_1, d_2]} \varphi \equiv \neg \boxplus_{[d_1, d_2]} \neg \varphi$ .

We now illustrate how to use SaSTL to specify various city requirements, especially for the dynamic deadlines, time intervals, spatial aggregation and spatial counting, and how important these operators mean for the smart city requirements using examples below.

**Example 1** (Dynamic Deadlines). *The first requirement in Table 1 is, “Limits vehicle idling to one minute adjacent to any school, pre-K to 12th grade, public or private, in the City of New York.” The requirement is specified using the SaSTL syntax as,*

$$(\text{Idel}_{\text{taxi}}) \mathcal{U}_{(0,1)} (\neg \text{Idel}_{\text{taxi}}) \wedge \text{school}$$

We use  $\mathcal{U}_{(0,1)}$  to specify the deadline (i.e., within 1 minute) in this formula, so that if a vehicle idling is detected (i.e.,  $\text{Idel}_{\text{taxi}}$  is True), then, it must be not idling within 1 minute, i.e.,  $\neg \text{Idel}_{\text{taxi}}$  has to be satisfied within 1 minute. To clarify, in SaSTL, the time range  $(0, 1)$  is a relative time interval, which means that 1 minute counts from when  $\text{Idel}_{\text{taxi}}$  is True.

In addition, we use the propositional variable  $p$  (i.e., “ $\wedge \text{school}$ ”) to specify that the locations are tagged as school.

**Example 2** (Time Intervals). *The third requirement in Table 1 is, “Prohibit sightseeing buses from using all bus lanes between the hours of 7:00 a.m. and 10:00 a.m. on weekdays”, is specified using the SaSTL syntax as,*

$$\square_{[7,10]} (\mathcal{C}_{[0,+\infty]} \text{BusLane}(\text{ssbus}) < \text{Num}(\text{BusLane}))$$

Assuming we monitor the bus lanes all day (from 12am), here we first use “ $\square_{[7,10]}$ ” to specify the time interval.  $\text{BusLane}(\text{ssbus})$  denotes the bus lane is occupied by a sightseeing bus. If it is True, there is at least one sightseeing bus on this lane.  $\mathcal{C}_{[0,+\infty]}$  counts the number of bus lanes that satisfy  $\text{BusLane}(\text{ssbus})$ , i.e., the total number of bus lanes that has at least one sightseeing bus, which should be less than the total number of bus lanes ( $\text{Num}(\text{BusLane})$ ).

**Example 3** (Spatial Aggregation). *Assume we have a requirement that specifies that the noise level near school areas in New York City as “The average noise level in the school area (within 1 km) should always be less than 50 dB and the worst should be less than 80 dB in the next 3 hours.”*

$$\boxplus_{[0,+\infty]} \square_{[0,3]} (\mathcal{A}_{[0,1]}^{\text{avg}} x_{\text{Noise}} < 50 \wedge \mathcal{A}_{[0,1]}^{\text{max}} x_{\text{Noise}} < 80) \wedge \text{School}$$

$\boxplus_{[0,+\infty]}$  indicates the whole range of New York city (pre-defined by users).  $\square_{[0,3]}$  indicates this requirement is valid for

the next three hours.  $\mathcal{A}_{[0,1]}^{\text{avg}} x_{\text{Noise}} < 50 \wedge \text{School}$  first specifies the locations labeled as “school”, then, calculates the average value in 1 km for each “school”.

Without spatial aggregation operators, STL cannot specify this requirement. A similar requirement on the noise level specified by STL could be  $\square_{[0,3]}(x_{\text{Noise}} < 50)$ , which only has the temporal domain and is specified on a single data source. To monitor the same spatial range, users have to repeatedly apply this requirement to each located sensor within 1 km of a school and do the same for all schools. Assuming there are 20 sensors for each school and 3000 schools in New York City, this single SaSTL formula approximately equals 60000 STL formulas. More importantly, STL could not specify “average” or “worst” noise level, instead, it only monitors each single value. However, the single value has a very high possibility to contain noisy data and thereby causes inaccurate results.

**Example 4 (Spatial Counting).** Assuming a requirement that “At least 90% of the streets, the particulate matter (PM<sub>x</sub>) emission should not exceed Moderate.”

$$\mathcal{C}_{[d_1, d_2]}^{\text{avg}}(\square_{[0, +\infty]}(x_{\text{PM}_x} < \text{Moderate})) > 0.9$$

We use  $\mathcal{C}_{[d_1, d_2]}^{\text{avg}} \varphi > 0.9$  to represent the percentage of satisfaction should be larger than 90%. Specifying the percentage or degree of satisfaction is very common and important in city requirements. Only SaSTL can specify this kind of requirement over a spatial domain.

### B. SaSTL Semantics

We define the SaSTL semantics as the *satisfiability relation*  $(\omega, t, l) \models \varphi$ , indicating that the spatio-temporal signal  $\omega$  satisfies an formula  $\varphi$  at the time point  $t$  in location  $l$  according to the following definitions. Note that the semantics are only well-defined when  $\pi_v(\omega)[t, l] \neq \perp$  and  $\alpha_{[d_1, d_2]}^x(\omega, t, l) \neq \emptyset$ .

$$\begin{aligned} (\omega, t, l) \models p & \Leftrightarrow \pi_p(\omega)[t, l] = \text{true} \\ (\omega, t, l) \models x \sim c & \Leftrightarrow \pi_x(\omega)[t, l] \sim c \\ (\omega, t, l) \models \neg \varphi & \Leftrightarrow (\omega, t, l) \not\models \varphi \\ (\omega, t, l) \models \varphi_1 \wedge \varphi_2 & \Leftrightarrow (\omega, t, l) \models \varphi_1 \text{ and } (\omega, t, l) \models \varphi_2 \\ (\omega, t, l) \models \varphi_1 \mathcal{U}_I \varphi_2 & \Leftrightarrow \exists t' \in (t + I) \cap \mathbb{T} : (\omega, t', l) \models \varphi_2 \\ & \quad \text{and } \forall t'' \in (t, t'), (\omega, t'', l) \models \varphi_1 \\ (\omega, t, l) \models \varphi_1 \mathcal{S}_I \varphi_2 & \Leftrightarrow \exists t' \in (t - I) \cap \mathbb{T} : (\omega, t', l) \models \varphi_2 \\ & \quad \text{and } \forall t'' \in (t', t), (\omega, t'', l) \models \varphi_1 \\ (\omega, t, l) \models \mathcal{A}_{[d_1, d_2]}^{\text{op}} x \sim c & \Leftrightarrow \text{op}(\alpha_{[d_1, d_2]}^x(\omega, t, l)) \sim c \\ (\omega, t, l) \models \mathcal{C}_{[d_1, d_2]}^{\text{op}} \varphi \sim c & \Leftrightarrow \text{op}(\{(\omega, t, l') \models \varphi \mid l' \in L_{[d_1, d_2]}^l\}) \sim c \end{aligned}$$

In Example 5, we illustrate the semantics of SaSTL with a simple example. However, in a real city, the requirement is more complicated and the number of locations and length of time is at a much larger scale.

**Example 5.** Following Example 3, checking the city states with a requirement,

$$\boxdot_{[0, +\infty]} \square_{[0, 3]} (\mathcal{A}_{[0, 1]}^{\text{avg}} x_{\text{Noise}} < 50) \wedge \text{School},$$

Assuming we have the noise level data from 20 sensors within 1 mile of one of the schools, the sensor readings in 30 minutes as,  $\{[51, \dots, 11], [80, \dots, 30], \dots, [40, \dots, 30]\}$ , then,  
at  $t = 1$ ,  $\text{avg}(51, \dots, 40) > 50$ ,  $\mathcal{A}_{[0, 1]}^{\text{avg}} x_{\text{noise}} > \text{Good} = \text{False}$ ,  
at  $t = 2$ ,  $\text{avg}(49, \dots, 20) < 50$ ,  $\mathcal{A}_{[0, 1]}^{\text{avg}} x_{\text{noise}} > \text{Good} = \text{True}$ ,  
...  
at  $t = 30$ ,  $\text{avg}(11, \dots, 30) < 50$ ,  $\mathcal{A}_{[0, 1]}^{\text{avg}} x_{\text{noise}} > \text{Good} = \text{True}$ ,  
thus,  $\square_{[0, 30]}(\text{False} \wedge \text{True} \wedge \text{True}) = \text{False}$ ,  
i.e.,  $\square_{[0, 3]}((\mathcal{A}_{[0, 1]}^{\text{avg}} x_{\text{noise}} > \text{Good}) \wedge \text{school}_1) = \text{False}$   
Similarly, the monitor checks all qualified schools and reaches the final results,

$$\boxdot_{[0, +\infty]} \square_{[0, 3]} (\mathcal{A}_{[0, 1]}^{\text{avg}} x_{\text{Noise}} < 50) \wedge \text{School} = \text{False}.$$

## V. EFFICIENT REAL-TIME MONITORING FOR SASTL

In this section, we first present a baseline monitoring algorithm for SaSTL, then describe two optimization methods to speed up the monitoring performance.

### A. Monitoring Algorithms for SaSTL

---

#### Algorithm 1: SaSTL monitoring algorithm Monitor( $\varphi, \omega, t, l, G$ )

---

**Function** Monitor( $\varphi, \omega, t, l, G$ ):

**Input** : SaSTL Requirement  $\varphi$ , Signal  $\omega$ , Time  $t$ , Location  $l$ , weighted undirected graph  $G$

**Output**: Satisfaction Value (Boolean value)

**begin**

**switch**  $\varphi$  **do**

**Case**  $p$   
            | **return**  $\pi_p[t, l]$ ;

**Case**  $x \sim c$   
            | **return**  $\pi_x(\omega)[t, l] \sim c$ ;

**Case**  $\neg \varphi$   
            | **return**  $\neg \text{Monitor}(\varphi, \omega, t, l, G)$ ;

**Case**  $\varphi_1 \wedge \varphi_2$  ; ▷ See Algorithm 5 for an improved algorithm.

        | **return**  $\text{Monitor}(\varphi_1, \omega, t, l, G) \wedge \text{Monitor}(\varphi_2, \omega, t, l, G)$

**Case**  $\varphi_1 \mathcal{U}_I \varphi_2$  ; ▷ See Algorithm 2.

        | **return**  $\text{SatisfyUntil}(\varphi_1, \varphi_2, I, \omega, t, l, G)$ ;

**Case**  $\mathcal{A}_{[d_1, d_2]}^{\text{op}} x \sim c$  ; ▷ See Algorithm 3

        | **return**  $\text{Aggregate}(x, \text{op}, d_1, d_2, t, l, G) \sim c$ ;  
        **Case**  $\mathcal{C}_{[d_1, d_2]}^{\text{op}} \varphi \sim c$  ; ▷ See Algorithm 4 for the standard version, and Algorithm 6 for an improved parallel version.

        | **return**  $\text{CountingNeighbours}(\varphi, \text{op}, d_1, d_2, t, l, G) \sim c$ ;

**end**

**end**

---

Algorithm 1 outlines the monitoring algorithm of SaSTL. The *inputs* of the monitor are the SaSTL requirements  $\varphi$  (including the time  $t$  and location  $l$ ), a weighted undirected graph  $G$  and the temporal-spatial data  $\omega$ . The *output* of the monitoring algorithm for each requirement is a Boolean value indicating whether the requirement is satisfied or not.

To start with, the monitoring algorithm parses  $\varphi$  to sub formulas and calculates the satisfaction for each operation recursively. We derived operators  $\square$  and  $\diamond$  from  $\mathcal{U}_I$ , and operators  $\boxdot$  and  $\boxlozenge$  from  $\mathcal{C}_{[d_1, d_2]}^{\text{op}} \varphi \sim c$ , so we only show the algorithms for  $\mathcal{U}_I$  and  $\mathcal{C}_{[d_1, d_2]}^{\text{op}} \varphi \sim c$ .

---

**Algorithm 2:** Satisfaction of  $(\varphi_1 U_I \varphi_2, \omega)$ 

---

**Function** SatisfyUntil  $(\varphi_1, \varphi_2, I, \omega, t, l, G)$ :

```
begin
  Boolean f := True;
  for  $t' \in (t + I) \cap \mathbb{T}$  do
    if Monitor( $\varphi_2, \omega, t', l, G$ ) then
      f := True;
      for  $t'' \in [t, t']$  do
        f := f  $\wedge$  Monitor( $\varphi_1, \omega, t'', l, G$ );
        if ( $\neg f$ ) then
          break;
        end
      end
      if (f) then
        return True;
      end
    end
  end
  return False;
end
```

---

We present the satisfaction algorithms of the operators  $\mathcal{A}_{[d_1, d_2]}^{\text{op}}$  and  $\mathcal{C}_{[d_1, d_2]}^{\text{op}}$  in Algorithm 3 and Algorithm 4, respectively. As we can tell from the algorithms, essentially,  $\mathcal{A}_{[d_1, d_2]}^{\text{op}}$  calculates the aggregated values on the signal over a spatial domain, while  $\mathcal{C}_{[d_1, d_2]}^{\text{op}}$  calculates the aggregated Boolean results over spatial domain. Both algorithms present the cases of all possible aggregation operations.

---

**Algorithm 3:** Aggregation of  $(x, \text{op}, d_1, d_2, \omega, t, l, G)$ 

---

**Function** Aggregate  $(x, \text{op}, d_1, d_2, \omega, t, l, G)$ :

```
begin
  Real v := 0;
  if op == "min" then v =  $\infty$ ;
  if op == "max" then v =  $-\infty$ ;
  for  $l' \in L_{[d_1, d_2]}^l$  do
    v := op(v,  $\pi_x(\omega)[t, l']$ );
  end
  return v;
end
```

---

---

**Algorithm 4:** Counting of  $(x, \text{op}, d_1, d_2, \omega, t, l, G)$ 

---

**Function** CountingNeighbours  $(\varphi, \text{op}, d_1, d_2, \omega, t, l, G)$ :

```
begin
  Real v := 0;
  if op == "min" then
    v :=  $\infty$ ;
  end
  if op == "max" then
    v :=  $-\infty$ ;
  end
  for  $l' \in L_{[d_1, d_2]}^l$  do
    if Monitor( $\varphi, \omega, t, l, G$ ) then
      v := op(v, 1);
    end
  end
end
```

---

The time complexity of monitoring the temporal operators of SaSTL is the same as STL as follows.

**Lemma 1** (Complexity of logical and temporal operators [22]).

- The time complexity to monitor classical logical operators or basic propositions such as  $\neg x$ ,  $\wedge$  and  $x \sim c$  is  $O(1)$ .
- The time complexity to monitor temporal operators such as  $\square_I$ ,  $\diamond_I$ ,  $U_I$  is  $O(T)$ , where  $T$  is the total number of samples within time interval  $I$ .

In this paper, we present the time complexity analysis for the spatial operators (Lemma 2) and the new SaSTL monitoring algorithm (Theorem 1). The total number of locations is denoted by  $n$ . We assume that the positions of the locations cannot change in time (a fixed grid). We can precompute all the distances between locations and store them in an array of range trees [23] (one range tree for each location). The time complexity to retrieve a set of nodes  $L$  with a distance to a desired location in a range  $[d_1, d_2]$  is  $O(\log(n) + |L|)$  [23].

We further denote the monitored formula as  $\phi$ , which can be represented by a syntax tree, and let  $|\phi|$  denote the total number of nodes in the syntax tree (number of operators).

**Lemma 2** (Complexity of spatial operators). *The time complexity to monitor at each location  $l$  at time  $t$  the satisfaction of a spatial operator such as  $\boxplus_{[d_1, d_2]}$ ,  $\boxtimes_{[d_1, d_2]}$ ,  $\mathcal{A}_{[d_1, d_2]}$ , and  $\mathcal{C}_{[d_1, d_2]}$  is  $O(\log(n) + |L|)$  where  $L$  is the set of locations at distance within the range  $[d_1, d_2]$  from  $l$ .*

*Proof.* As explained before, the time complexity to retrieve  $L$  locations distant between  $d_1$  and  $d_2$  from a location  $l$  is  $O(\log(n) + |L|)$ . The aggregation and counting operations of Algorithm 3 and Algorithm 4 can be performed while the locations are retrieved.  $\square$

The time complexity of the monitoring framework is given in Theorem 1.

**Theorem 1.** *The time complexity of Algorithm 1 is upper-bounded by  $O(|\phi| T_{\max} (\log(n) + |L|_{\max}))$  where  $T_{\max}$  is the largest number of samples of the intervals considered in the temporal operators of  $\phi$  and  $|L|_{\max}$  is the maximum number of locations defined by the spatial temporal operators of  $\phi$ .*

*Proof.* This follows from the previous Lemmas, by considering  $T_{\max}$  the worst possible number of samples that we need to consider for all possible intervals of temporal operators present in the formula and  $|L|_{\max}$  for the worst possible number of locations that we need to consider.  $\square$

### B. Performance Improvement of SaSTL Parsing

To monitor a requirement, the first step is parsing the requirement to a set of sub formulas with their corresponding spatial-temporal ranges. Then, calculate the results for the sub formulas. Traditional parsing process of STL builds and calculate the syntax tree on the sequential order of the formula. It does not consider the complexity of each sub-formula. However, in many cases, especially with the PoIs specified in smart cities, checking the simpler propositional variable to quantify the spatial range first can significantly reduce the number of temporal signals to check in a complicated formula. For example, the city abstracted graph in Figure 2, the large nodes represent the locations of PoIs, and the red ones represent the schools, and blue ones represent other PoIs. The small nodes represent the locations of data sources (e.g. sensors). Assuming a requirement  $\boxplus_{[0, +\infty]} \boxplus_{[a, b]} (\mathcal{A}_{[d_1, d_2]} \varphi) \wedge \text{Schools}$  requires to aggregate and check  $\varphi$  only nearby schools (i.e., the red

circles), but it will actually check data sources of all nearby 12 nodes if one is following the traditional parsing algorithm. In New York City, there are about 2000 primary schools, but hundreds of thousands of PoIs in total. A very large amount of computing time would be wasted by this way.

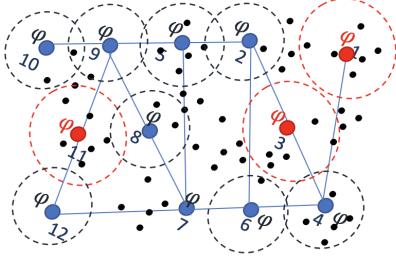


Figure 2: An example of city abstracted graph. A requirement is  $\Box_{[0,+\infty]} \Box_{[a,b]} (\mathcal{A}_{[d_1,d_2]} \varphi) \wedge \text{Schools}$  (The large nodes represent the locations of PoIs, and the red ones represent the schools, and blue ones represent other PoIs. The small node represent the locations of data sources (e.g. sensors).)

To deal with this problem, we now introduce a monitoring cost function  $\text{cost} : \Phi \times L \times G_L \rightarrow \mathbb{R}^+$ , where  $\Phi$  is the set of all the possible SaSTL formulas,  $L$  is the set of locations,  $G_L$  is the set of all the possible undirected graphs with  $L$  locations,  $L_{[d_1,d_2]}^l := \{l' \in L \mid 0 \leq d_1 \leq d(l, l') \leq d_2\}$ . The cost function for  $\varphi$  is defined as:

$$\text{cost}(\varphi, l, G) = \begin{cases} 1 & \text{if } \varphi := p \vee \varphi := x \sim c \vee \varphi := \text{True} \\ 1 + \text{cost}(\varphi_1, l, G) & \text{if } \varphi := \neg \varphi_1 \\ \text{cost}(\varphi_1, l, G) + \text{cost}(\varphi_2, l, G) & \text{if } \varphi := \varphi_1 * \varphi_2, * \in \{\wedge, \vee\} \\ |L_{[d_1,d_2]}^l| & \text{if } \varphi := \mathcal{A}_{[d_1,d_2]} x \sim c \\ |L_{[d_1,d_2]}^l| \text{cost}(\varphi_1, l, G) & \text{if } \varphi := \mathcal{C}_{[d_1,d_2]} \varphi_1 \sim c \end{cases}$$

Using the above function, the cost of each operation is calculated before “switch  $\varphi$ ” in Algorithm 1. The cost function measures how complex it is to monitor a particular SaSTL formula. This can be used when the algorithm evaluates the  $\wedge$  operator and it establishes the order in which the sub-formulas should be evaluated. The simpler sub-formula is the first to be monitored, while the more complex one is monitored only when the other sub-formula is satisfied. We updated  $\varphi_1 \wedge \varphi_2$  in Algorithm 5.

#### Algorithm 5: Satisfaction of $(\varphi_1 \wedge \varphi_2, \omega)$

```

case  $\varphi_1 \wedge \varphi_2$  do
  return Monitor( $\varphi_1, \omega, t, l, G$ )  $\wedge$  Monitor( $\varphi_2, \omega, t, l, G$ ) if
     $\text{cost}(\varphi_1, l, G) \leq \text{cost}(\varphi_2, l, G)$  then
      if  $\neg \text{Monitor}(\varphi_1, \omega, t, l, G)$  then
        return Monitor( $\varphi_2, \omega, t, l, G$ );
      end
      return True;
    end
  if  $\neg \text{Monitor}(\varphi_2, \omega, t, l, G)$  then
    return Monitor( $\varphi_1, \omega, t, l, G$ );
  end
  return True;
end

```

With this cost function, the time complexity is reduced to  $O(|\phi|T_{max}(\log(n) + |L'|_{max}))$  ( $|L'|_{max} \leq |L|_{max}$ ) (See Lemma 3). The improvement is significant to the real-time city requirements, because in many cases,  $|L|_{max}$  is hundreds or thousands times of  $|L'|_{max}$ .

**Lemma 3.** *The time complexity of algorithm Monitor( $\phi, \omega$ ) is upper bounded by  $O(|\phi|T_{max}(\log(n) + |L'|_{max}))$  ( $|L'|_{max} \leq |L|_{max}$ ) with a spatial cost function.*

*Proof.* According to Theorem 1, the time complexity of algorithm Monitor( $\phi, \omega$ ) is upper-bounded by  $O(|\phi|T_{max}(\log(n) + |L|_{max}))$ , with the parsing cost function, every  $|L|$  is reduced to  $|L'|$ , therefore, the time complexity is upper bounded by  $O(|\phi|T_{max}(\log(n) + |L'|_{max}))$  ( $|L'|_{max} \leq |L|_{max}$ ).  $\square$

**Example 6.** Extending Example 3, assume a requirement is that the air quality within 1 mile of all the parks in NYC is better than Good. The SaSTL specifies it as,  $\Box_{[0,+\infty]} \Box_{[0,24]} (\text{Park} \wedge \mathcal{A}_{[0,1]}^{\text{avg}}(x_{\text{air}} > \text{Good}))$ .

The syntax parsing tree is shown in Figure 3. For each node, the spatial-temporal range is below the box. For example, the spatial range is  $[0, +\infty]$  and temporal range is  $[0, 24]$  for Node (3) updated by Node (2). Here,  $[0, +\infty]$  indicates the spatial range is all the nodes in the city, which could be over 10000 nodes. The range for Node (4) is updated by  $\{\text{Park}_i\} \times [0, 24]$  using the cost function, which is the number of parks. Assuming there are 100 parks, the execution time of  $\mathcal{A}_{[0,1]}^{\text{avg}}(x_{\text{air}} > \text{Good})$  is reduced about 100 times without considering other overhead.

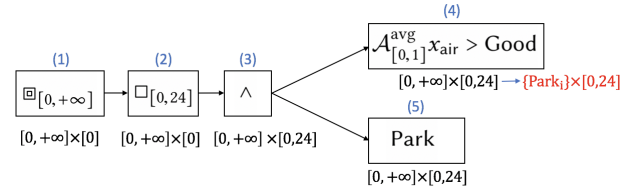


Figure 3: Parsing an SaSTL requirement ( $\Box_{[0,+\infty]} \Box_{[0,24]} (\text{Park} \wedge \mathcal{A}_{[0,1]}^{\text{avg}}(x_{\text{air}} > \text{Good}))$ ).

#### C. Parallelization

In the traditional STL monitor algorithm, the signals are checked sequentially. For example, to see if the data streams from 12 locations satisfies  $\Box_{[0,+\infty]} \Box_{[0,+\infty]} \varphi$  in Figure 2, usually, Algorithm 1 would first check the signal from location 1 with  $\Box_{[0,+\infty]} \varphi$ , then location 2, and so on. At last, calculates the result from 12 locations with  $\Box_{[0,+\infty]}$ . In this example, the first step is the most time-consuming part.

To reduce the computing time, we parallelize the monitoring algorithm in the spatial domain. We briefly explain the idea; instead of calculating the formula at all locations sequentially, we distribute the tasks to different threads and check them in parallel.

Algorithm 6 presents the parallel version of the spatial counting operator  $\mathcal{C}_{[d_1,d_2]}$ . To start with, all satisfied locations

$l' \in L_{[d_1, d_2]}^l$  are added to a task pool (a queue). In the mapping process, each thread retrieves monitoring tasks from the queue and execute them in parallel. All threads only execute one task at one time and is assigned a new one from the pool when it finishes the last one, until all tasks are executed. Each task obtains the satisfaction of  $\text{Monitor}(\varphi, \omega, t, l, G)$  function, and calculates the local result  $v_i$  of operation  $\text{op}()$ . The reduce step sums all the parallel results and calculates a final result of  $\text{op}()$ .

**Algorithm 6:** Parallelization of Counting of  $(x, \text{op}, d_1, d_2, \omega, t, l, G)$

**Function** CountingNeighbours  $(\varphi, \text{op}, d_1, d_2, \omega, t, l, G)$ :

```

begin
  paratasks = Queue();
  for  $l' \in L_{[d_1, d_2]}^l$  do
    paratasks.add( $l'$ );
  end
  results = Queue();
  for  $i$  in  $1..NumThreads$  do
    Thread $_i \leftarrow \text{worker}(\varphi, \omega, t, G)$ ;
  end
  Wait();
  return  $\text{op}(\text{results})$ ;
end

```

**Function** worker  $(\varphi, \omega, t, G)$ :

```

begin
  Real  $v := 0$ ;
  if  $\text{op} == \text{"min"}$  then  $v := \infty$ ;
  if  $\text{op} == \text{"max"}$  then  $v := -\infty$ ;
  while  $Num(\text{tasks}) > 0$  do
     $l = \text{paratasks.pop}()$ ;
     $\text{moni} = \text{Monitor}(\varphi, \omega, t, l, G)$ ;
     $v = \text{op}(v, \text{moni})$ ;
  end
  results.add( $v$ );
end

```

**Lemma 4.** *The time complexity of the parallelized algorithm  $\text{Monitor}(\phi, \omega)$  is upper bounded by  $O((\frac{|\phi_s|}{P} + |\phi_t|)T_{max}(\log(n) + |L'|_{max}))$  when distributed to  $P$  threads, where  $|\phi_s|$  is the number of spatial operators, and  $|\phi_t|$  is the number of temporal operators.*

*Proof.* According to Lemma 3, the time complexity of algorithm  $\text{Monitor}(\phi, \omega)$  is upper-bounded by  $O(|\phi|T_{max}(\log(n) + |L'|_{max}))$ , which equals to  $O(|\phi_s|T_{max}(\log(n) + |L'|_{max})) + O(|\phi_t|T_{max}(\log(n) + |L'|_{max}))$ , with  $|\phi| = |\phi_s| + |\phi_t|$ .

With the spatial operation distributed to  $P$  threads, the time complexity of the spatial operation is reduced to  $O(\frac{|\phi_s|T_{max}(\log(n) + |L'|_{max})}{P})$ . Therefore, according to Amdahl's law, the parallelized time complexity of the total  $\text{Monitor}$  algorithm is upper bounded by  $O((\frac{|\phi_s|}{P} + |\phi_t|)T_{max}(\log(n) + |L'|_{max}))$ .  $\square$

In general, the parallel monitor on the spatial domain reduces the computational time significantly. It is very helpful to support a real-time monitor and decision making, especially when there is a large number of requirements to be monitored in a short time. However, not all requirements receive a better computational time with parallel computing. It depends on the complexity of temporal and spatial domains as well as the amount of data to be monitored. For example, if the signal in temporal domain is very short, the overhead may be larger than

the time saved from parallel computing. More comprehensive experimental analysis is presented in Section VI.

## VI. EVALUATION

We perform an evaluation of the real-time monitor by applying it to two city application scenarios, which are (i) runtime conflict detection and resolution among smart services in a simulated New York city and (ii) runtime monitoring of real-time city requirements in Chicago.

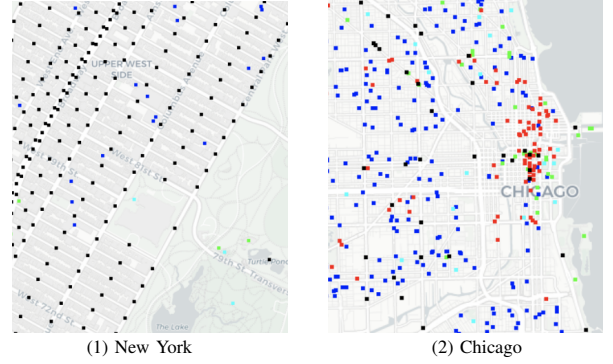


Figure 4: Partial Maps of Chicago and New York with PoIs and sensors annotated. (The black nodes represent the locations of sensors, red nodes represent the locations of hospitals, dark blue nodes represent schools, light blue nodes represent parks and green nodes represent theaters.)

Table II: Information of Two Application Scenarios

|                         | New York                                                                                                            | Chicago                                            |
|-------------------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Area (mi <sup>2</sup> ) | 22.82                                                                                                               | 234                                                |
| Data Type               | Real-time Predicted States                                                                                          | Real-time States                                   |
| Data Sources            | Simulated Sensors and Actuators                                                                                     | Real Sensors and Public Information                |
| Number of Sensor Nodes  | 10000                                                                                                               | 118                                                |
| Time Period             | -                                                                                                                   | 2017.01-2019.05                                    |
| Sampling Rate           | 10 seconds                                                                                                          | 1 min                                              |
| Domain                  | Environment, Transportation, Events, Emergencies, Public Safety                                                     | Environment, Public Safety                         |
| Variables               | CO, NO, O <sub>3</sub> , PM <sub>x</sub> , Noise, Traffic, Pedestrian, Signal Lights, Emergency Vehicles, Accidents | CO, NO, O <sub>3</sub> , Visible light, Crime Rate |

To begin, we provide the information of two application scenarios in Table II. Figure 4 presents the map of a part of the two cities, where the locations of PoIs and sensors are marked. More details of the city data and experimental settings are described in the sub-sections of each application below, where we (1) introduce the application scenario and city real-time safety requirements (*Introduction*), (2) demonstrate the value of the SaSTL monitor for the city (*City Performance*) and (3) illustrate the efficiency of the algorithm (*Algorithm Performance*).

### A. Runtime Conflict Detection and Resolution in Simulated New York City

1) *Introduction:* The framework of runtime conflict detection and resolution considers a scenario where smart services

Table III: Safety and Performance Requirements for New York City

|             | Requirement                                                                                                                                                                                 | SaSTL                                                                                                                                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NYR1</b> | The average noise level in the school area (within 1km) should always be less than 50dB in the next 30min.                                                                                  | $\Box_{[0,+\infty]} \Box_{[0,30]} (\mathcal{A}_{[0,1]}^{\text{avg}} x_{\text{Noise}} < 50) \wedge \text{School}$                                                                                                                                |
| <b>NYR2</b> | If an accident happens, at least for one main street within 2km of a hospital, the number of vehicles waiting in a street should not reach the level of congestion during 5 p.m. to 6 p.m.. | $\text{Accident} \rightarrow \Box_{[0,+\infty]} \mathcal{C}_{[d_1, d_2]} (\mathcal{A}_{[0,2]}^{\text{avg}} x_{\text{Traffic}} < \text{Congestion}) \wedge \text{Hospital}) > 0$                                                                 |
| <b>NYR3</b> | If there is an event, the max number of pedestrians waiting in an intersection should not be greater than 50 for more than 10 minutes.                                                      | $\text{Event} \rightarrow \Box_{[0,+\infty]} \Box_{[0,10]} (\mathcal{A}_{[0,1]}^{\text{max}} x_{\text{Noise}} < 50)$                                                                                                                            |
| <b>NYR4</b> | At least 90% of the streets, the PMx emission should not exceed <i>Moderate</i> in 60 min.                                                                                                  | $\mathcal{C}_{[d_1, d_2]}^{\text{avg}} (\Box_{[0,60]} (\mathcal{A}_{[0,1]}^{\text{max}} x_{\text{PMx}} < \text{Moderate})) > 0.9$                                                                                                               |
| <b>NYR5</b> | If an accident happens, nearby (0.5km) traffic should be above moderate on average and safe in worst case within 1 hour or until the accident is solved.                                    | $\text{Accident} \rightarrow \Box_{[0,+\infty]} (\mathcal{A}_{[0,0.5]}^{\text{avg}} x_{\text{traffic}} < \text{Moderate} \wedge \mathcal{A}_{[0,0.5]}^{\text{max}} x_{\text{traffic}} < \text{Safe}) \mathcal{U}_{[0,60]} \neg \text{Accident}$ |

send action requests to the city center, and where a simulator predicts how the requested actions change the current city states over a finite future horizon of time. The SaSTL real-time monitor is used to specify requirements and check the *predicted spatial-temporal data* with the SaSTL formulas. If there exists a requirement violation within the future horizon, a conflict is detected. To resolve the conflict, it provides several possible resolution options and predicts the outcome of all these options, which are verified by the SaSTL monitor. It finds the best option without a violation, otherwise, it provides the trade-offs between a few potential resolution options to the city manager through monitoring the predicted traces. Details of the resolution are not the main part of this paper and we thank the original authors for making the solution available to the authors of the present paper.

Five examples of different types of real-time requirements and their formalized SaSTL formulas are given in Table III. To monitor the effects brought by requested actions, a requirement is usually specified with an effective deadline, such as “in the next 30 min”.

We set up a smart city simulation of New York City using the Simulation of Urban MObility (SUMO) [24] with the real city data [25], on top of which, we implement 10 smart services (S1: Traffic Service, S2: Emergency Service, S3: Accident Service, S4: Infrastructure Service, S5: Pedestrian Service, S6: Air Pollution Control Service, S7: PM2.5/PM10 Service, S8: Parking Service, S9: Noise Control Service, and S10: Event Service). The real-time states from the domains of environment, transportation, events and emergencies are generated from about 10000 simulated nodes. Please see Table II for the variables.

We use the STL Monitor as the *baseline* to compare the capability of requirement specification and the ability to improve city performance. We simulate the city running for 30 days in three control sets, one without any monitor, one with the STL monitor and one with the SaSTL monitor. For the first set (no monitor), there is no requirement monitor implemented. For the second one (STL monitor), we specify NYR1 to NYR5 using STL without aggregation over multiple locations, i.e., NYR1 is a set of requirements on many locations and each location has a temporal requirement. For example, NYR1 is specified as  $\varphi_{l_i} = \Box_{[0,t]} (x_{\text{air}} > \text{Moderate})$ , where  $l_i \in L$ ,  $L$  is a set of sensors within the range. The setting is the same for the rest of the requirements. For the third one (SaSTL monitor), we monitor the city with the five SaSTL requirements defined

in Table III.

2) *NY City Performance*: The results are shown in Table IV. We measure the city performance from the domains of transportation, environment, emergency and public safety using the following metrics, the total number of violations detected, the average CO (mg) emission per street, the average noise (dB) level per street, the emergency vehicles waiting time per vehicle per intersection, the average number and waiting time of vehicles waiting in an intersection per street, and the average pedestrian waiting time per intersection. To be noted, the number of violations detected is the total number of real-time safety requirements violated, rather than the number of conflicts. Many times there is more than one requirement violated in one conflict.

We make some observations by comparing and analyzing the monitoring results. First, *the SaSTL monitor obtains a better city performance with less number of violations detected under the same scenario*. As shown in Table IV, the number of violations detected by SaSTL Monitor is 46 less than the STL monitor. On average, the framework of conflict detection and resolution with the SaSTL monitor improves the air quality by 21.6% and 40.8% comparing to the one with the STL monitor and without a monitor, respectively. It improves the pedestrian waiting time by 16.6% and 47.2% comparing to the STL monitor and without a monitor, respectively.

Table IV: Comparison of the City Performance with the STL Monitor and the SaSTL Monitor

|                                    | No Monitor | STL Monitor | SaSTL Monitor |
|------------------------------------|------------|-------------|---------------|
| <b>Number of Violation</b>         | Unknown    | 219         | <b>173</b>    |
| <b>Air Quality Index</b>           | 67.91      | 51.22       | <b>40.18</b>  |
| <b>Noise (db)</b>                  | 73.32      | 49.27       | <b>41.42</b>  |
| <b>Emergency Waiting Time (s)</b>  | 20.32      | 12.93       | <b>11.88</b>  |
| <b>Vehicle Waiting Number</b>      | 22.7       | 18.2        | <b>12.6</b>   |
| <b>Pedestrian Waiting Time (s)</b> | 190.2      | 130.9       | <b>61.1</b>   |
| <b>Vehicle Waiting Time (s)</b>    | 112.12     | 70.98       | <b>59.22</b>  |

Second, *the SaSTL monitor can help refine the safety requirements in real time and supports improving the design of smart services*. We also compare the number of violations on each requirement. The results (Figure 5 (1)) help the city managers to measure city’s performance with smart services for different aspects, and also help policymakers to see if the requirements are too strict to be satisfied by the city and make a more realistic requirement if necessary. For example, in our 30 days simulation, apparently, NYR4 on air pollution is the one requirement that is violated by most of the smart services.

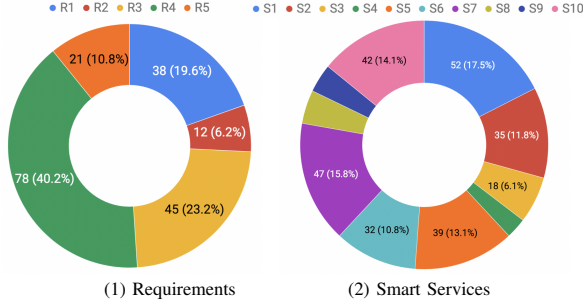


Figure 5: Distributions of the violations over requirements and smart services

Similarly, Figure 5 (2) shows the number of violations caused by different smart services. Most of the violations are caused by S1, S5, S6, S7, and S10. The five major services in total cause 71.3% of the violations. City service developers can also use these statistics to adjust the requested actions, the inner logic and parameters of the functions of the services, so that they can design a more compatible service with more acceptable actions in the city.

3) *Algorithm Performance*: We compare the average computing time for each requirement under four conditions, (1) using the standard parsing algorithm without the cost function, (2) improved parsing algorithm with a single thread, (3) improved parsing algorithm with spatial parallelization using 4 threads and (4) using 8 threads. The result is shown in Table V.

Table V: Computing time of requirements with standard parsing function, with improved parsing functions and different number of threads

|       | Standard Parsing (s) | 1 thread (s) | 4 threads (s) | 8 threads (s) |
|-------|----------------------|--------------|---------------|---------------|
| NYR1  | 2102.13              | 140.29       | 50.31         | <b>26.12</b>  |
| NYR2  | 55.2                 | <b>0.837</b> | 1.023         | 0.912         |
| NYR3  | 69.22                | 22.25        | 7.54          | <b>4.822</b>  |
| NYR4  | 390.19               | 390.19       | 100.23        | <b>53.32</b>  |
| NYR5  | 61.76                | 61.76        | 20.25         | <b>15.68</b>  |
| Total | 2678.5               | 615.32       | 179.35        | <b>100.85</b> |

First, the improved parsing algorithm reduces the computing time significantly for the requirement specified on PoIs, especially for NYR1 that computing time reduces from 2102.13 seconds to 140.29 seconds (about 15 times).

Second, the parallelization over spatial operator further reduces the computing time in most of the cases. For example, for NYR1, the computing time is reduced to 26.12 seconds with 8 threads while 140.29 seconds with single thread (about 5 times). When the amount of data is very small (NYR2), the parallelization time is similar to the single thread time, but still much efficient than the standard parsing.

The results demonstrate the effectiveness and importance of the efficient monitoring algorithms. In the table, the total time of monitoring 5 requirements is reduced from 2678.5 seconds to 100.85 seconds. In the real world, when multiple requirements are monitored simultaneously, the improvement is extremely important for real-time monitoring.

## B. Runtime Monitoring of Real-Time Requirement in Chicago

1) *Introduction*: We apply SaSTL to monitor the real-time requirements in Chicago. The framework is the same as shown in Figure 1, where we first formalize the city requirements to SaSTL formulas and then monitor the city states with the formalized requirements. Chicago is collecting and publishing the city data [6], [26] every day since January, 2017 without a state monitor. In this evaluation, we emulate the real data as it arrives in real time, i.e. assuming the city was operating with the monitor. Then we specify 80 safety and performance requirements, and apply the SaSTL to monitor the data every 3 hours continuously to identify the requirement violations.

2) *Chicago Performance*: Valuable information is identified from the real-time monitor results of different periods during a day. We randomly select 30 days of weekdays and 30 days of weekends. We divide the daytime of a day into 4 time periods and 3 hours per time period. We calculate the percentage of satisfaction (i.e., number of satisfied requirement days/30 days) for each time period, respectively. The results of two example requirements CR1 and CR2 are shown in Figure 6. CR1 specifies “The average air quality within 5km of all schools should always be above *Moderate*.” and is formalized as  $\Box_{[d_1, d_2]} \Box_{[0, t]} (\mathcal{A}_{[0, 5]}^{\text{avg}} x_{\text{air}} > \text{Moderate}) \wedge \text{School}$ . CR2 specifies “For the blocks with a high crime rate, the average light level within 3 km should always be *High*” and is formalized as  $\Box_{[d_1, d_2]} \Box_{[0, 3]} (x_{\text{Crime}} > \text{High} \rightarrow \mathcal{A}_{[0, 3]}^{\text{avg}} x_{\text{Light}} > \text{High})$ .

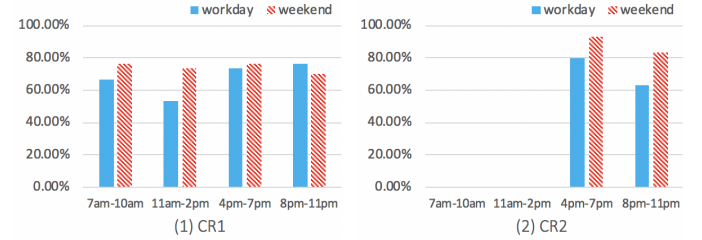


Figure 6: Requirement Satisfaction Rate during Different Time Period in Chicago

The real-time monitor results can be potentially used by different stakeholders.

First, *with proper requirements defined, the city decision makers are able to identify and take actions to resolve or even avoid the violations in time*. For example, based on the real-time monitoring results of requirement CR1, decision makers can take actions to redirect the traffic near schools and parks to improve the air quality. Another example of requirement CR2, the satisfaction is much higher (up to 33% higher in CR2, 8pm - 11pm) over weekends than workdays. There are more people and vehicles on the street on weekends, which as a result also increases the lighted areas. However, as shown in the figure, the city lighting in the areas with high crime rate is only 60%. An outcome of this result for city managers is that they should pay attention to the illumination of workdays or the areas without enough light to enhance public safety.

Second, it gives the citizens the ability to learn the city conditions and map that to their own requirements. They can make decisions on their daily living, such as the good time to visit a park. For example, requirement CR1, 11am - 2pm has the lowest satisfaction rate of the day. The instantaneous air quality seems to be fine during rush hour, but it has an accumulative result that affects citizens' (especially students and elderly people) health. A potential suggestion for citizens who visit or exercise in the park is to avoid 11am - 2pm periods.

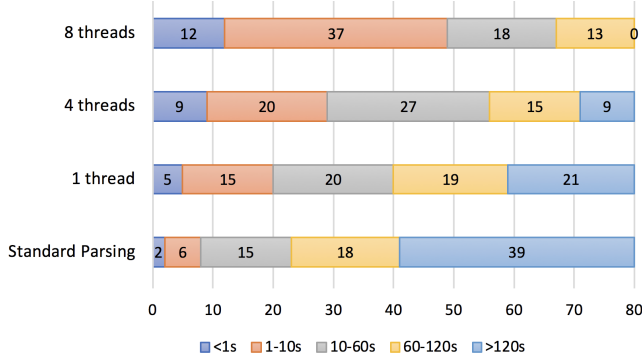


Figure 7: Distribution of the Number of Requirements on the Computing Time

3) *Algorithm Performance*: We count the average monitoring time taken by each requirement when monitoring for 3-hour data. Then, we divide the computing time into 5 categories, i.e., less than 1 second, 1 to 10 seconds, 10 to 60 seconds, 60 to 120 seconds, and longer than 120 seconds, and count the number of requirements under each category under the conditions of standard parsing, improved parsing with single thread, 4 threads, and 8 threads. The results are shown in Figure 7. Comparing the 1st (standard parsing) and 4th (8 threads) bar, without the improved monitoring algorithms, about for 50% of the requirements, each one takes more than 2 minutes to execute. The total time of monitoring all 80 requirements is about 2 hours, which means that the city decision maker can only take actions to resolve the violation at earliest 5 hours later. However, with the improved monitoring algorithms, for 49 out of 80 requirements, each one of them is executed within 60 seconds, and each one of the rest is executed within 120 seconds. The total execution time is reduced to 30 minutes, which is a reasonable time to handle as many as 80 requirements. More importantly, it illustrates the effectiveness of the parsing function and parallelization methods. Even if there are more requirements to be monitored in a real city, it is doable with our approach by increasing the number of processors.

## VII. RELATED WORK

Smart cities are special cases of cyber-physical systems (CPS) featuring a large amount of spatial distributed components that are responsible for monitoring and controlling the physical environment. In the last decade, new formal

specification languages have been proposed to define spatial-temporal requirements over the execution of CPS with spatial distributed components. For example, Talcott [27] has introduced the notion of a spatial-temporal event-based model for CPS. In such a model, the execution of actions, the exchange of messages and the physical changes trigger events that are processed by a monitor after being labeled with time and space stamps. This concept is further elaborated in [28] where a 2D Cartesian coordinate with location points and location fields system is used to represent the space. However, the approaches proposed in [27], [28] lack a spatio-temporal logic formalism enabling the specification of the requirements and the automatic monitoring generation. Other mathematical structures such as *topological spaces*, *closure spaces*, *quasi-discrete closure spaces* and *finite graphs* [20] can be used to reason about spatial relations, such as *closeness* and *neighborhood* in the context of *collective adaptive systems* [29]. Monitoring spatial distributed cyber-physical systems requires to deal with real-value signals over continuous time. Therefore, a common approach to design a specification language for spatio-temporal properties consists in extending *STL* [19] with spatial operators. Recent examples are *SpaTeL* [30], *SSTL* [20] and *STREL* [21]. Despite being well-defined and used in several CPS applications, none of these logic systems can be directly applied to smart city requirements specification. The *SaSTL* proposed in this paper is meant to fill the blank between the formal logics and smart cities. Comparing to the spatial *STL* discussed above, *SaSTL* (1) specifies the spatial operators with distance and PoIs from the real world, (2) adds new aggregation operators, (3) adds a counting operator, and (4) monitors efficiently with parallel processing.

## VIII. DISCUSSION

While we believe that the work presented here is a major advance to the state of art, there are still open questions. Today, most smart cities do employ a centralized dashboard solution similar to the model we assume. As cities and services grow, a more decentralized model may be necessary. However, the solution presented here can be decentralized by creating a hierarchy of monitors.

The use of a monitor like *SaSTL* to predict future violations is strongly dependent on the quality and accuracy of the model of city performance. In this work we used *SUMO* which was developed by the transportation community over many years and is considered state of the art. Developing more comprehensive and accurate models is necessary, but is orthogonal to this work.

## IX. CONCLUSION

In this paper, we present a novel Spatial Aggregation Signal Temporal Logic (*SaSTL*) to specify and to monitor real-time safety requirements of smart cities at runtime. We develop an efficient monitoring framework that optimize the requirement parsing process and can check in parallel a *SaSTL* requirement over multiple data streams generated from thousands of sensors that are typically spatially distributed over a smart city.

SaSTL is a powerful specification language for smart cities because of its capability to monitor the city desirable features of temporal (e.g. real-time, interval), spatial (e.g., PoIs, range) and their complicated relations (e.g. always, everywhere, aggregation) between them. More importantly, it can coalesce many requirements into a single SaSTL formula and provide the result efficiently, which is a major advance on what smart cities do now. We believe it is a valuable step towards developing a practical smart city monitoring system even though there are still open issues for future work.

## REFERENCES

- [1] IBM, “Smarter cities: New cognitive approaches to long-standing challenges,” 2019. [Online]. Available: [https://www.ibm.com/smarterplanet/us/en/smarter\\_cities/overview/](https://www.ibm.com/smarterplanet/us/en/smarter_cities/overview/)
- [2] M. Ma, S. M. Preum, W. Tarneberg, M. Ahmed, M. Ruiters, and J. Stankovic, “Detection of runtime conflicts among services in smart cities,” in *SMARTCOMP, 2016 IEEE International Conference on*. IEEE, 2016, pp. 1–10.
- [3] M. Ma, S. M. Preum, and J. A. Stankovic, “Cityguard: A watchdog for safety-aware conflict detection in smart cities,” in *Proceedings of the Second International Conference on Internet-of-Things Design and Implementation*, 2017, pp. 259–270.
- [4] E. Bartocci, J. Deshmukh, A. Donzé, G. Fainekos, O. Maler, D. Ničković, and S. Sankaranarayanan, “Specification-based monitoring of cyber-physical systems: a survey on theory, tools and applications,” in *Lectures on Runtime Verification*. Springer, 2018, pp. 135–175.
- [5] M. Ma, J. A. Stankovic, and L. Feng, “Cityresolver: a decision support system for conflict resolution in smart cities,” in *Proceedings of the 9th ACM/IEEE International Conference on Cyber-Physical Systems*. IEEE Press, 2018, pp. 55–64.
- [6] C. E. Catlett, P. H. Beckman, R. Sankaran, and K. K. Galvin, “Array of things: a scientific research instrument in the public way: platform design and early lessons learned,” in *Proceedings of the 2nd International Workshop on Science of Smart City Operations and Platforms Engineering*. ACM, 2017, pp. 26–33.
- [7] New York Times, “IBM takes ‘smarter cities’ concept to rio de janeiro,” 2012. [Online]. Available: <http://www.nytimes.com/2012/03/04/business/ibm-takes-smarter-cities-concept-to-rio-de-janeiro.html>
- [8] Cisco, “Smart+connected operations center.” [Online]. Available: <https://www.cisco.com/c/en/us/solutions/industries/smart-connected-communities/city-operations-center.html>
- [9] NYC.gov, “Emissions from transportation, nyc environment protection,” 2019. [Online]. Available: [https://www1.nyc.gov/html/dep/html/air/emissions\\_from\\_transportation.shtml](https://www1.nyc.gov/html/dep/html/air/emissions_from_transportation.shtml)
- [10] S. Matteo and J. Brannan, “A local law to amend the administrative code of the city of new york, in relation to restricting the use of bus lanes by sight-seeing buses,” in *Restricting the use of bus lanes by sight-seeing buses*. The New York City Council, 2019.
- [11] NYC Environment Protection, “Use of heating oil remaining in tanks.” The city of New York, 2019.
- [12] United States Environmental Protection Agency, “Residential energy efficiency,” in *Energy Resources for State and Local Governments*. The city of New York, 2019.
- [13] San Francisco, “San Francisco noise pollution construction,” in *San Francisco American Legal Publishing*, 2019.
- [14] Hong Kong, “Guide to indoor air quality management in hong kong regional offices and public places,” in *Guide to Indoor Air Quality Management*, 2019.
- [15] NYC.gov, “Stopping, standing or parking prohibited in specified places,” in *New York Public Law*, 2016.
- [16] Beijing Emergency Agency, “Pre-hospital medical emergency regulations,” 2016.
- [17] Beijing Government, “Safety management for kindergarten, primary and secondary school,” 2016.
- [18] DC.gov, “Notice of draft title V permit public comment period – architect of the capitol, library buildings and grounds jurisdiction, library of congress,” 2019.
- [19] O. Maler and D. Nickovic, “Monitoring temporal properties of continuous signals,” in *Proc. FORMATS*, 2004.
- [20] L. Nenzi, L. Bortolussi, V. Ciancia, M. Loret, and M. Massink, “Qualitative and quantitative monitoring of spatio-temporal properties,” in *Runtime Verification - 6th International Conference, RV 2015 Vienna, Austria, September 22-25, 2015. Proceedings*, ser. LNCS, vol. 9333. Springer, 2015, pp. 21–37.
- [21] E. Bartocci, L. Bortolussi, M. Loret, and L. Nenzi, “Monitoring mobile and spatially distributed cyber-physical systems,” in *Proc. of MEMOCODE 2017: the 15th ACM-IEEE International Conference on Formal Methods and Models for System Design*. ACM, 2017, pp. 146–155.
- [22] A. Donzé, T. Ferrere, and O. Maler, “Efficient robust monitoring for STL,” in *International Conference on Computer Aided Verification*. Springer, 2013, pp. 264–279.
- [23] G. S. Lueker, “A data structure for orthogonal range queries,” in *19th Annual Symposium on Foundations of Computer Science*. IEEE Computer Society, 1978, pp. 28–34.
- [24] M. Behrisch, L. Bieker, J. Erdmann, and D. Krajzewicz, “Sumo—simulation of urban mobility: an overview,” in *Proceedings of SIMUL 2011, The Third International Conference on Advances in System Simulation*. ThinkMind, 2011.
- [25] NYC.gov, *New York City Open Data*, <https://nycopendata.socrata.com/>.
- [26] City of Chicago, “Crimes of Chicago - one year prior to present,” 2018. [Online]. Available: <https://data.cityofchicago.org/Public-Safety/Crimes-Map/dfnk-7re6>
- [27] C. L. Talcott, “Cyber-physical systems and events,” in *Software-Intensive Systems and New Computing Paradigms - Challenges and Visions*, ser. Lecture Notes in Computer Science. Springer, 2008, vol. 5380, pp. 101–115.
- [28] Y. Tan, M. C. Vuran, and S. Goddard, “Spatio-temporal event model for cyber-physical systems,” in *2009 29th IEEE International Conference on Distributed Computing Systems Workshops*. IEEE, 2009, pp. 44–50.
- [29] V. Ciancia, D. Latella, M. Loret, and M. Massink, “Spatial logic and spatial model checking for closure spaces,” in *Proc. of SFM 2016: the 16th International School on Formal Methods for the Design of Computer, Communication, and Software Systems*, ser. LNCS, vol. 9700. Springer, 2016, pp. 156–201.
- [30] I. Haghighi, A. Jones, J. Z. Kong, E. Bartocci, G. R., and C. Belta, “SpaTeL: A Novel Spatial-Temporal Logic and Its Applications to Networked Systems,” in *Proc. of HSCC*, 2015.